



# JACKY

PATENTED



EUROPEAN  
WARRANTY

### MATERIAL:

Vertical collector in painted carbon steel 90x30 mm.  
Horizontal heating elements in painted carbon steel 50x20 mm.

### FIXING KIT:

Brackets, airvent, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, user notice.  
The kit is certified from TÜV in compliance with VDI 6036-class 4.

### PACKAGING:

The radiator is protected by a film in polyethylene and with a carton box.  
User notice included.

### PAINTING PROCESS:

Painted with ecological epoxy. (Certificate DIN 55900-1,-2).  
Thermal outputs certified in accredited laboratories in compliance with European norm EN442.

### COLOURS:

Radiator and accessories: standard white colour R01.

## PRODUCT CERTIFICATES



P. max: 5 bar

T. max: 110° C

Available for central heating systems

Connections: n° 2 x 1/2" gas - n° 2 x 1/2" gas

## REVERSIBLE



## ACCESSORIES



**Elegant square manual valve kit painted pure white R01**

Copper connection Ø 12/14/15  
Art. Nr. 5991990310553

Multilayer connection Ø 16  
Art. Nr. 5991990310552



**Elegant square pipe centres 50 mm valve kit painted pure white R01 with thermostatic head - right**

Copper connection Ø 12/14/15  
Art. Nr. 5991990310543

Multilayer connection Ø 16  
Art. Nr. 5991990310542



**Tinta valve pipe centres 50 mm with thermostatic head - right**

Copper connection Ø 12/14/15  
Art. Nr. 5991990311217

Multilayer connection Ø 16  
Art. Nr. 5991990311216



**Elegant with thermostatic head square pure white R01 painted valve kit**








Copper connection Ø 12/14/15  
Art. Nr. 5991990310539

Multilayer connection Ø 16  
Art. Nr. 5991990310538



**Sleeving kit for Pipe Centres 50 mm - valves polished**

Art. Nr. 5103000000057

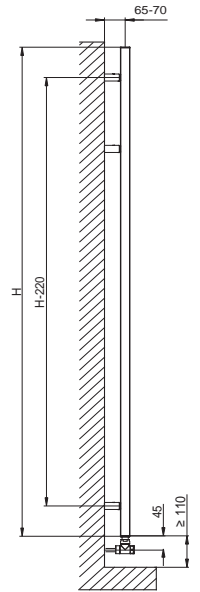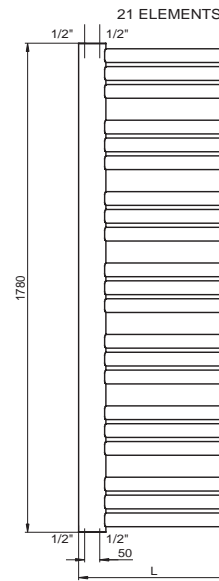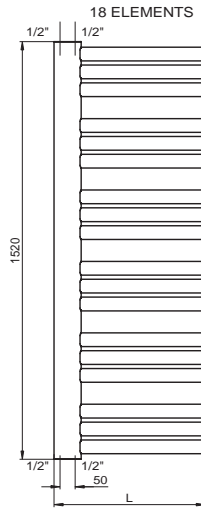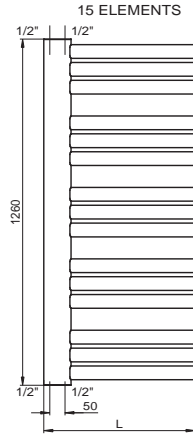

## JACKY

Art. Nr.	Height		Width	Pipe Centres	Dry Weight	Surface	Water Content	Thermal output Watt		Exponent n
	H [mm]	L [mm]						$\Delta t = 50^{\circ}\text{C}$	$\Delta t = 30^{\circ}\text{C}$	
3551776101001	<b>1260</b>	500	50	14,4	1,1	7,8	566	306	1,2030	
3551776101002	<b>1520</b>	500	50	17,3	1,3	9,4	654	352	1,2133	
3551776101003	<b>1780</b>	500	50	20,2	1,5	11,0	741	397	1,2233	

Art. Nr. are referred to colour WHITE R01 version.

For output at different  $\Delta t$  than  $50^{\circ}\text{C}$ , please refer to the following formula: desired output = output at  $\Delta t 50^{\circ}\text{C}$  x (desired  $\Delta t/50$ )<sup>n</sup>