



# KELLY

POLISHED STAINLESS STEEL



## 15 YEARS WARRANTY

### MATERIAL:

Vertical collectors in polished stainless steel with  $\varnothing$  of 38 mm.  
Horizontal heating elements in polished stainless steel with  $\varnothing$  of 18 mm.

### FIXING KIT:

Brackets, airvent, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, user notice.  
The kit is certified from TÜV in compliance with VDI 6036-class 4.

### PACKAGING:

The radiator is protected by a film in polyethylene and with a carton box.  
User notice included.

### FEATURES:

It is totally made in stainless steel with an unalterable finishing guaranteed during the years.  
Thermal outputs certified in accredited laboratories in compliance with European norm EN442.

## PRODUCT CERTIFICATES




P. max: 8 bar

T. max: 110° C

Available for central heating systems

Connections: n° 4 x 1/2" gas

## REVERSIBLE



## ACCESSORIES



**Elegant square polished valve kit pipe centres 50 mm with thermostatic head - right**

Copper connection  $\varnothing$  12/14/15  
Art. Nr. 5991990301076


Multilayer connection  $\varnothing$  16  
Art. Nr. 5991990301075



**Elegant square manual polished valve kit**


Copper connection  $\varnothing$  12/14/15  
Art. Nr. 5991990301084

Multilayer connection  $\varnothing$  16  
Art. Nr. 5991990301083



**Kit 2 hooks polished stainless steel**

Art. Nr. 5991990010223




Measures for valves type Cordivari Elegant Square with thermostatic head and pipe centres 50 mm



**Sleeving kit for Pipe Centres 50 mm - valves polished**

Art. Nr. 5103000000057

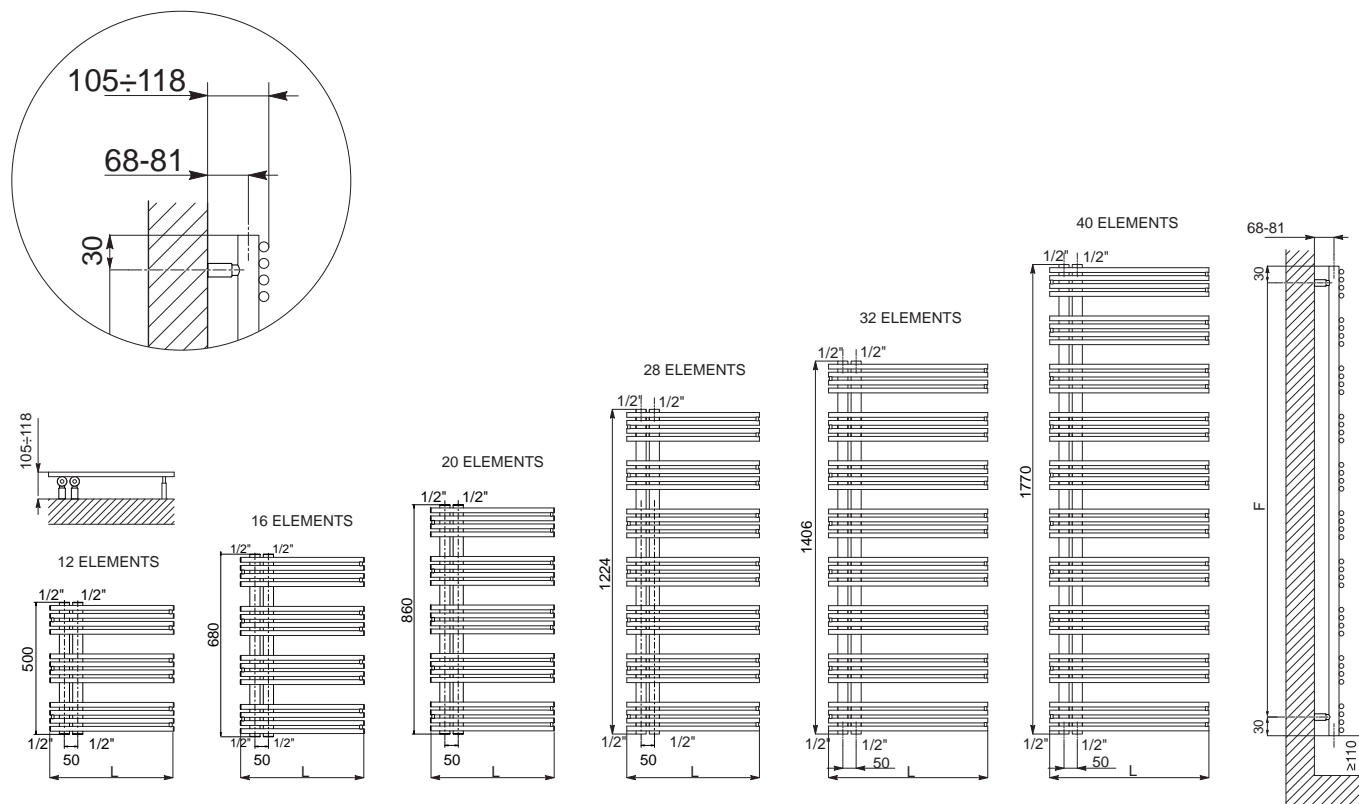**KELLY** POLISHED STAINLESS STEEL

Art. Nr.	Height	Width	Pipe Centres	Fixing kit centres	Dry Weight	Surface	Water Content	Thermal output Watt		Exponent n
	H [mm]	L [mm]	I [mm]	F [mm]	[Kg]	[m <sup>2</sup> ]	[lt]	$\Delta t = 50^{\circ}\text{C}$	$\Delta t = 30^{\circ}\text{C}$	
3551780400104	<b>500</b>	400	50	436	3,8	0,39	1,87	166	90	1,1996
3551780400099		500	50	436	4,4	0,45	2,10	208	113	1,1996
3551780400105	<b>680</b>	400	50	618	5,01	0,52	2,52	214	116	1,1996
3551780400107		500	50	618	5,81	0,61	2,83	259	139	1,2117
3551780400106	<b>860</b>	400	50	800	6,3	0,65	3,18	283	152	1,2118
3551780400100		500	50	800	7,3	0,77	3,60	323	168	1,2771
3551780400101	<b>1224</b>	500	50	1164	10,27	1,08	5,03	434	225	1,2881
3551780400111		600	50	1164	11,66	1,24	5,56	504	261	1,2851
3551780400102	<b>1406</b>	500	50	1346	11,76	1,24	5,76	489	256	1,2692
3551780400112		600	50	1346	13,3	1,42	6,30	584	303	1,2862
3551780400103	<b>1770</b>	500	50	1710	14,75	1,55	7,20	624	321	1,2990
3551780400113		600	50	1710	16,7	1,78	7,90	726	377	1,2832

For output at different  $\Delta t$  than  $50^{\circ}\text{C}$ , please refer to the following formula: desired output = output at  $\Delta t 50^{\circ}\text{C}$  x (desired  $\Delta t/50$ )<sup>n</sup>